



Kompakt Mono

Sealing for wall penetrations of gas, water, sewage pipes, and cables against pressing and non-pressing water



FIELDS OF APPLICATION

Sealing of wall penetrations with gas, water and waste water pipes made of PE-HD pipes with standard dimensions against non-pressing water, e.g. non-accumulating seepage water. Sealing of uncovered wall penetrations as a blind seal.

MATERIAL

Material type: EPDM-Rubber

Shore hardness: Shore A 43° ±5

Pressure plates: V2A stainless steel

Rubber thickness: 20 mm

Bolts: V2A stainless steel

PROPERTIES

Temperature range: -30 °C to + 120 °C


UV-resistant: Yes

Pressure-tight: 0,3 bar

Description: Tightness against non-pressurised water. Protection against soil moisture and dirt.

SIZE

Core drilling 80 to 100 mm

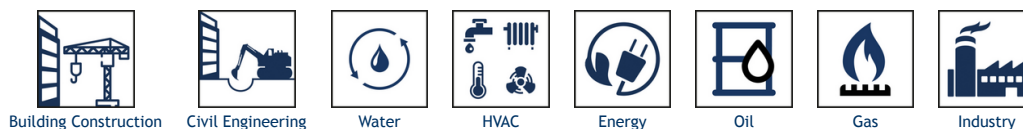

i PRODUCT INFORMATION

PROPERTIES

- Special applications for different pipe systems
- Consist of stainless steel pressure plate
- All Kompakt Solo split versions are foldable

FIELDS OF APPLICATION

- Sealing for wall penetrations of gas, water, sewage pipes and cables
- Against pressing and non-pressing water

DESCRIPTION

The rubber element is compressed by means of two metal discs. The Kompakt seals the annular space between carrier pipe and casing pipe/core hole against water and gas.



NOTES

- Kompakt seals are not an anchoring point.
- The carrier pipes must be centered and supported.
- A coating system should be used for the core drilling to create a smooth surface and to seal the concrete.
- For long clamping distances, additional hexagonal socket wrenches in a longer design are required.
- The specified values for pressure tightness are valid at 23 °C. For other, especially higher continuous operating temperatures, changing temperatures and permanent pressures, an ejection safety device must be fitted; this also applies to annular spaces larger than 100 mm.
- Please be sure to ask us in advance about the technical feasibility of planned applications for which there is no description (e.g. applications in the biogas or food industry).

SUITABLE ACCESSORIES

- PipeX FZH
- ProteX Epoxy Resin
- ProteX Core Hole Sealing



CERTIFICATES

TEXT

- ZERTIFIKAT_ISO_9001_2015
- AEO-CERTIFICATE Authorized Economic Operator "AEOC (customs simplification)"

MFPA pressure test: Solo; Combi:

SKZ pressure test: Varia:

Radon tight: Test report Dr. Joachim Kemski:

FHRK quality seal: FHRK test specification GE 101 seals (Test report no. G 30 322-6-1), Kompakt non-split version:

Material EPDM: Material testing DVGW W270; UBA ELL Drinking water application:




 **INSTALLATION**




1
Clean casing pipe/core drilling and carrier pipe. Carrier pipes must be suitable, dimensionally stable and without damage in the sealing area. Core drillings have to be made true to scale and with a smooth inner side.



2
We recommend coating core drillings with ProteX epoxy resin in order to protect the concrete and smoothen possible cavities/grooves.



3
Verify the casing pipe/core drilling and carrier pipe diameters based on the sealing kit data. Insert the Kompakt seal into the casing pipe or core drilling flush with the wall and insert the carrier pipe. Care must be taken to ensure the sealing insert is mounted on the outside of the building (tolerance for the carrier pipes).



4
In doing so, the nuts should preferably point to the inside in order to be accessible for subsequent tightening. The Kompakt seal split version is available for subsequent mounting. Tighten the nuts a few turns clockwise. Repeat this procedure two or three times, but not beyond the maximum torque (see table below). Tighten again after half an hour!

Wall opening ID	Carrier pipe OD
50 mm	6 - 12 mm
70 mm	20 - 41 mm
80 mm	20 - 50 mm
100 mm	15 - 65 mm
125 mm	55 - 78 mm
150 mm	46 - 110 mm
200 mm	88 - 160 mm
250 mm	135 - 210 mm
300 mm	178 - 226 mm
350 mm	224 - 282 mm
400 mm	270 - 330 mm

WHAT MUST BE OBSERVED

- The Kompakt seal is not an anchorpoint or pipe support. The seal can only assume a sealing function
- The carrier pipes have to be centred and supported (fixed)
- We recommend reducing the respective maximum torques in case of particularly thin-walled plastic pipes such as flexible casing and corrugated pipes (see table below)
- For long clamping strokes, deep hexagon sockets are additionally required for installation
- All building and pipeline guidelines are to be observed
- Use only in suitable casings acc. table Installation tolerances with suitable sealing surface in the inner wall and suitable rigidity (dimensional stability after installation)

INSTALLATION NOTE

We expressly draw your attention to the fact that the installation must be carried out by an authorized specialist company in accordance with the installation instructions.



RECOMMENDATION

To create a suitable sealing surface, we recommend coating core holes with PSI KB epoxy resin. This serves to protect the concrete and to smooth out any blowholes/grooves

TOOLS

Cleaning material/preparation, measuring tool, torque wrench, aids for markings

Nuts	Max. Torque	Torque for thin-walled plastic pipes	WR Super Soft	KTW
M 6	5 Nm	5 Nm	3 Nm	8 Nm
M 8	17 Nm for standard seal 20 Nm for standard seal	8 Nm for standard seal 15 Nm for standard seal	5 Nm	12 Nm
M 10	30 Nm	22 Nm	-	25 Nm
M 12	35 Nm	25 Nm	-	30 Nm